



▣ Features

- ROHS Compliant
- High power rating
- High rejection

▣ Pricing

Quantity	Unit Price
1 ~ 10	₩ 45,000
11 ~ 24	₩ 43,000
25 ~ 49	₩ 38,000
50 ~ 99	₩ 33,000
100 ~	₩ 25,000

▣ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	1270	-	1270	-	MHz
Bandwidth	5	1267.5	-	1272.5	MHz
Insertion Loss	1267.5 ~ 1272.5	-	2.8	3.0	dB
Ripple		-	0.1	0.5	dB
Return Loss		18.0	20.0	-	dB
Attenuation	1200	55.0	63.0	-	dB
	1340	35.0	40.0	-	dB
	2540	45.0	50.0	-	dB
	-	-	-	-	-
	-	-	-	-	-

▣ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

▣ Dimension

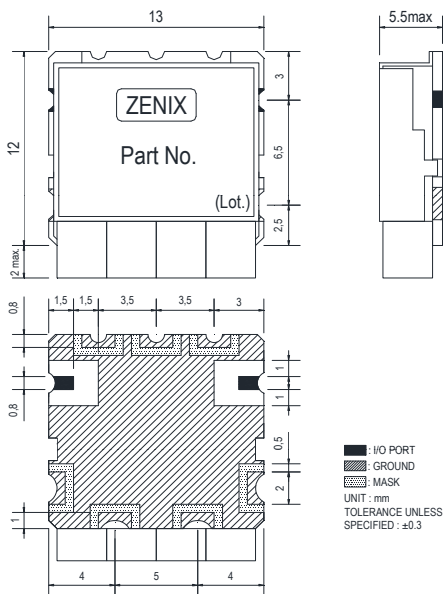

▣ PCB Layout

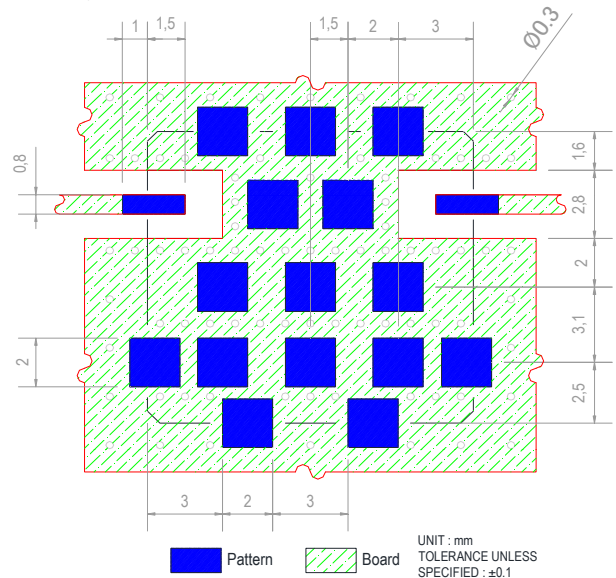

For product information and a complete list of distributors, please go to our website

www.zenix08.com


address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

▣ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

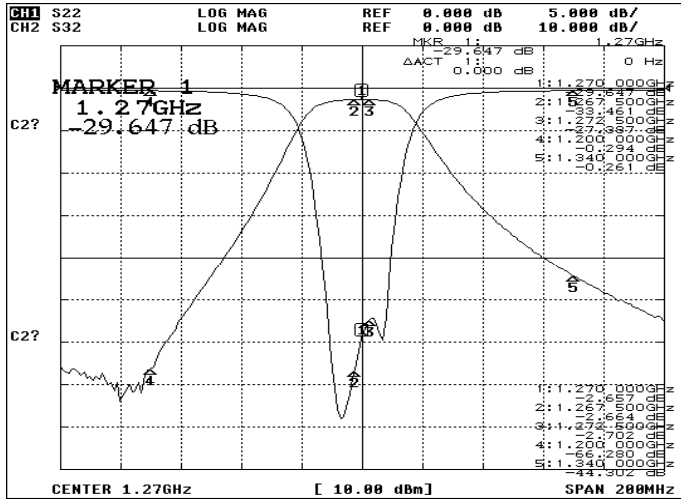

- Attenuation

