



### Features

- ROHS Compliant
- High power rating
- High rejection

### Pricing

Quantity	Unit Price
1 ~ 10	₩ 45,000
11 ~ 24	₩ 43,000
25 ~ 49	₩ 38,000
50 ~ 99	₩ 33,000
100 ~	₩ 25,000

### Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	1375	-	1375	-	MHz
Bandwidth	Single Tone	-	-	-	MHz
Insertion Loss	1375MHz	-	1.5	3.0	dB
Ripple		-	-	-	dB
Return Loss		15.0	18.0	-	dB
Attenuation	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-

### Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

### Dimension

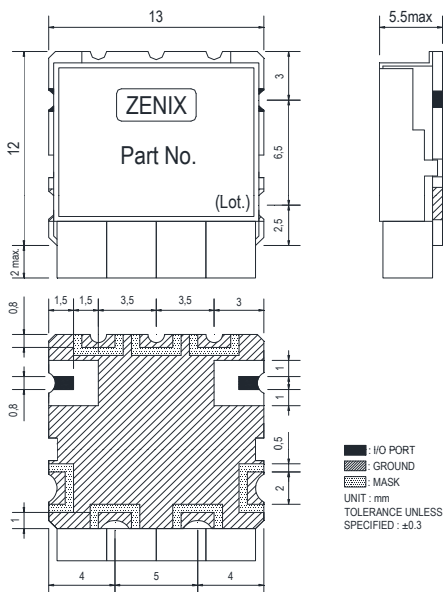

### PCB Layout

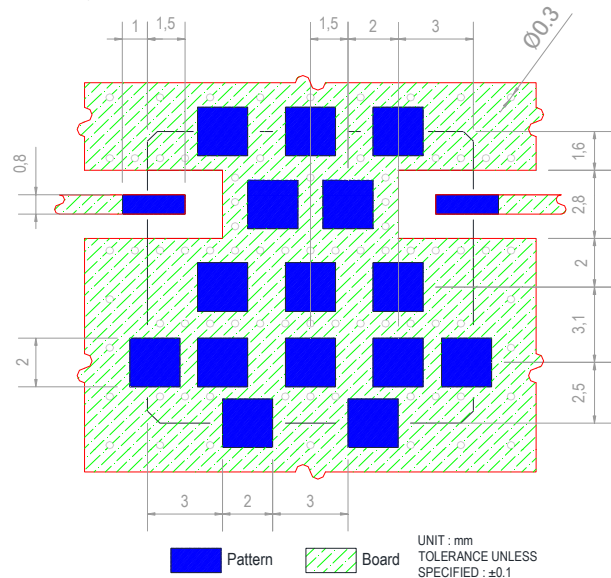

## Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

