

Ceramic Bandpass Filter 50Ω

ZBA-34C-2135BW150A



Features

- ROHS Compliant
- High power rating
- High rejection

Pricing

Quantity	Unit Price
1 ~ 10	₩ 45,000
11 ~ 24	₩ 43,000
25 ~ 49	₩ 38,000
50 ~ 99	₩ 33,000
100 ~	₩ 25,000

Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	2135	-	2135	-	MHz
Bandwidth	150	2060	-	2210	MHz
Insertion Loss	2060 ~ 2210	-	1.2	1.5	dB
Ripple		-	0.2	0.3	dB
Return Loss		15.0	17.0	-	dB
Attenuation	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

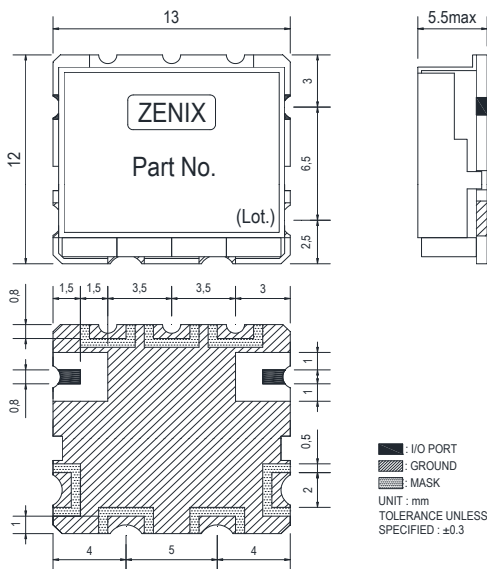

PCB Layout

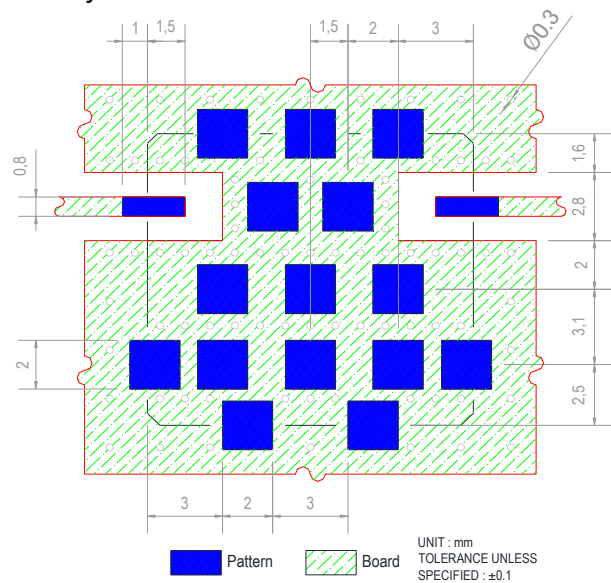

For product information and a complete list of distributors, please go to our website

www.zenix08.com


address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100


Fax : +82-31-8025-7200

Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

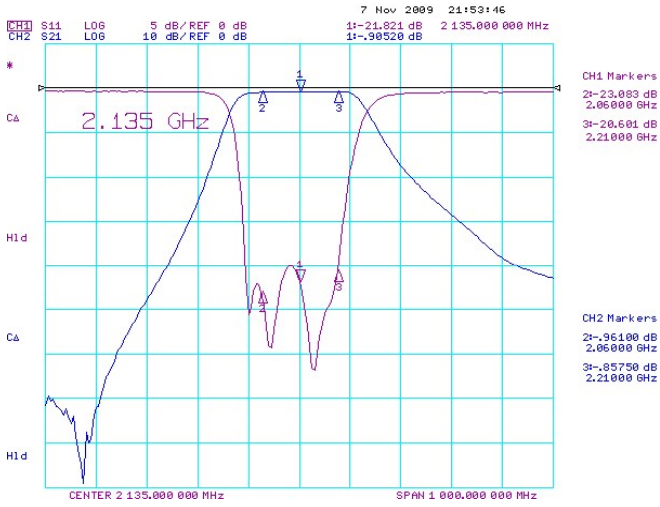

- Insertion Loss 1dB Scale

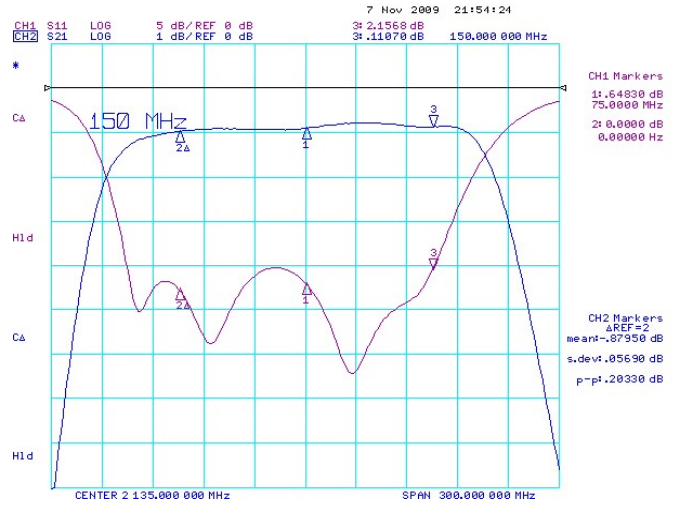

RF& MICROWAVE TOTAL SOLUTION

For product information and a complete list of distributors, please go to our website

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

www.zenix08.com