

■ Features

- ROHS Compliant
- High power rating
- High rejection

■ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	1960	-	1960	-	MHz
Bandwidth	60	1930	-	1990	MHz
Insertion Loss	1930 ~ 1990	-	3.0	3.5	dB
Ripple		-	0.4	1.0	dB
Return Loss		10.0	12.0	-	dB
Attenuation	1920	15.0	16.0	-	dB
	2000	15.0	16.0	-	dB
	-	-	-	-	-
	-	-	-	-	-
	-	-	-	-	-

■ Maximum Ratings


Input Power Handling	5Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

■ Dimension

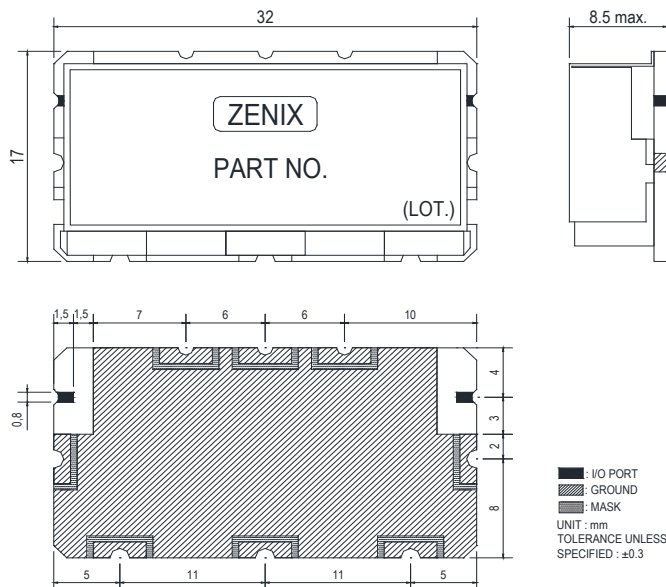

■ PCB Layout

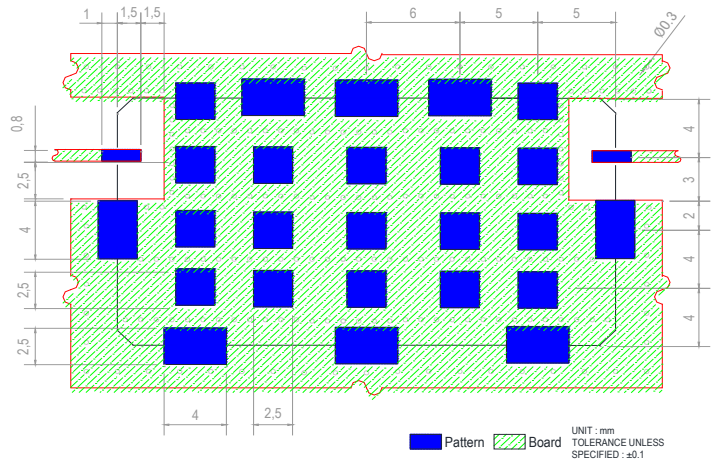

■ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

