



**Features**

- ROHS Compliant
- High power rating
- High rejection

**Pricing**

Quantity	Unit Price
1 ~ 10	₩ 35,000
11 ~ 24	₩ 33,000
25 ~ 49	₩ 30,000
50 ~ 99	₩ 25,000
100 ~	₩ 19,000

**Electrical Specifications**


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	155	-	155	-	MHz
Bandwidth	50	130	-	180	MHz
Insertion Loss	130 ~ 180	-	2.5	3.0	dB
Ripple		-	1.5	2.0	dB
Return Loss		14.0	15.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	110	40.0	-	-	dB
	200	40.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

**Maximum Ratings**


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

**Dimension**

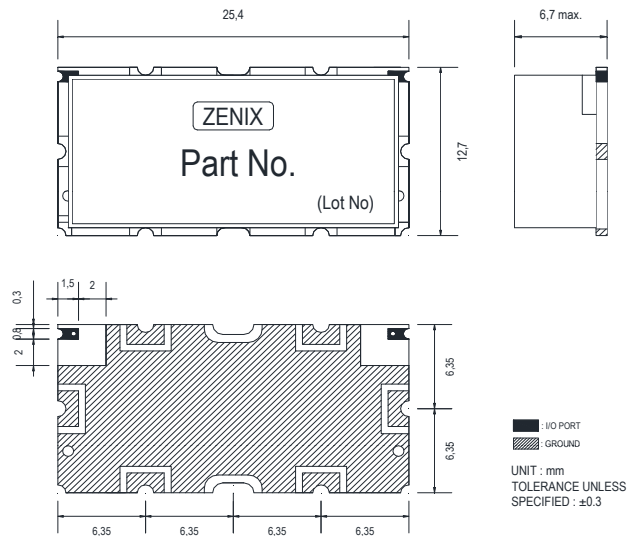

**PCB Layout**

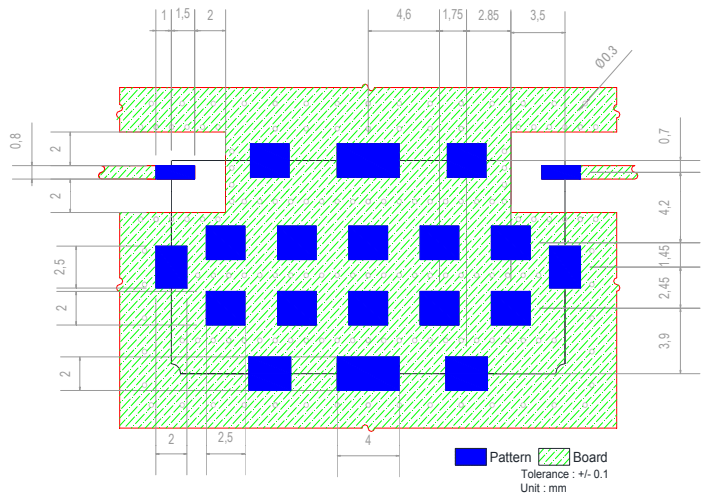

▣ Typical Performance Data at 25°C

- Insertion Loss , Return Loss , Ripple , Attenuation

