



Features

- ROHS Compliant
- High power rating
- High rejection

Pricing

Quantity	Unit Price
1 ~ 10	₩ 40,000
11 ~ 24	₩ 38,000
25 ~ 49	₩ 34,000
50 ~ 99	₩ 29,000
100 ~	₩ 21,000

Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	60	-	60	-	MHz
Bandwidth	15	52.5	-	67.5	MHz
Insertion Loss	52.5 ~ 67.5	-	-	2.0	dB
Ripple		-	0.5	1.0	dB
Return Loss		15.0	-	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	20.0	ns
Attenuation		35	60.0	-	-
	85	60.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

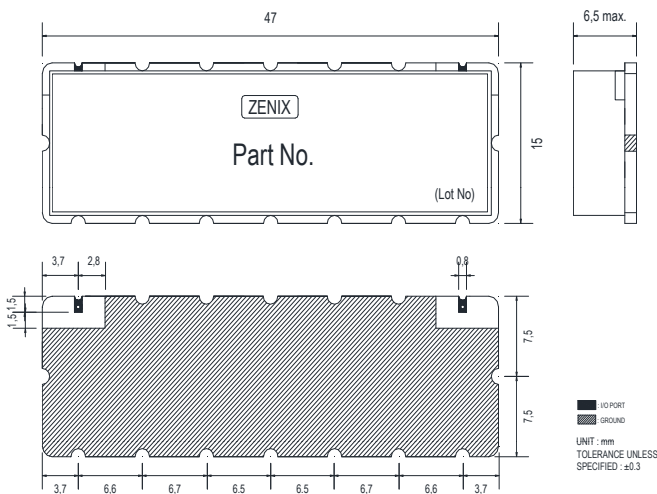


PCB Layout

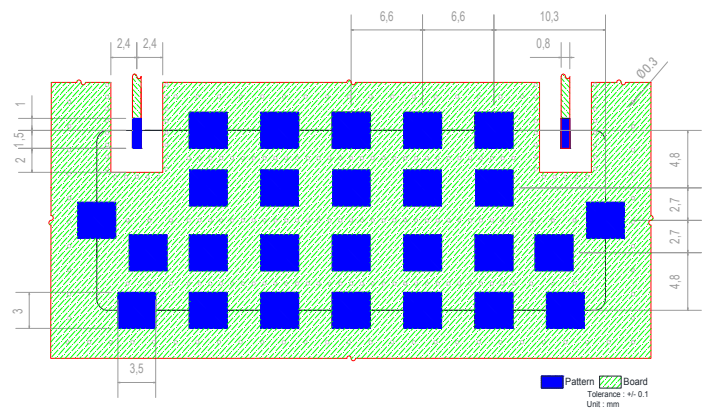


Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss

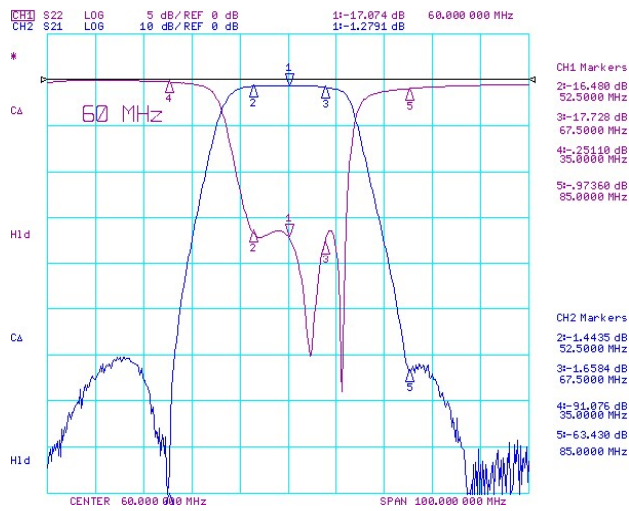

- Attenuation

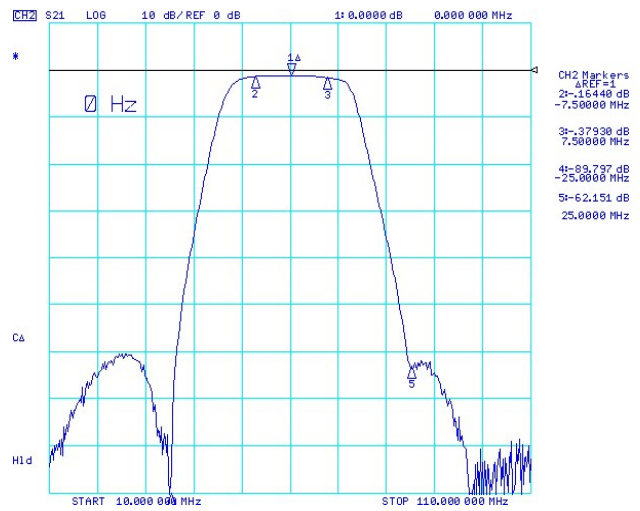

- Group Delay

