



**Features**

- ROHS Compliant
- High power rating
- High rejection

**Pricing**

Quantity	Unit Price
1 ~ 10	₩ 35,000
11 ~ 24	₩ 33,000
25 ~ 49	₩ 30,000
50 ~ 99	₩ 25,000
100 ~	₩ 19,000

**Electrical Specifications**


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	77	-	77	-	MHz
Bandwidth	22.0	66	-	88	MHz
Insertion Loss	66 ~ 88	-	2.5	3.0	dB
Ripple		-	1.2	1.5	dB
Return Loss		16.0	18.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	DC~30	40.0	-	-	dBc
	50	25.0	-	-	dBc
	95	20.0	-	-	dB
	140~500	45.0	-	-	dB
	-	-	-	-	dB

**Maximum Ratings**


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

**Dimension**

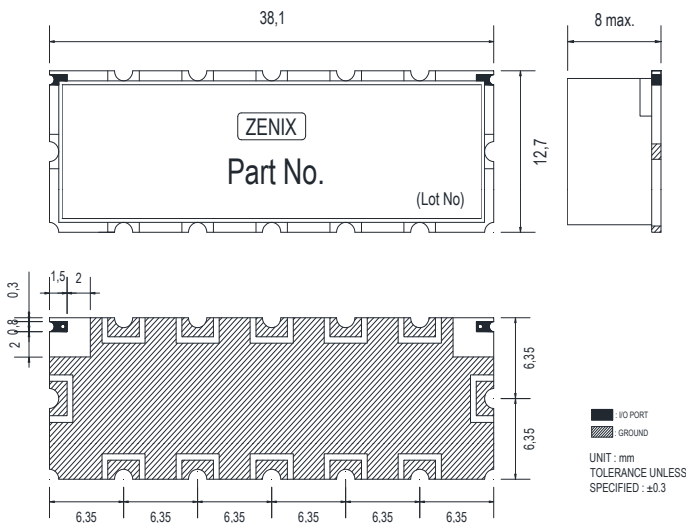


**PCB Layout**

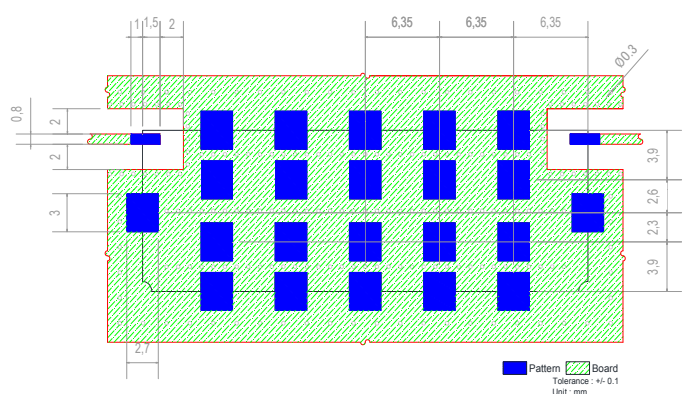

## Typical Performance Data at 25°C

- Insertion Loss , Ripple , Return Loss

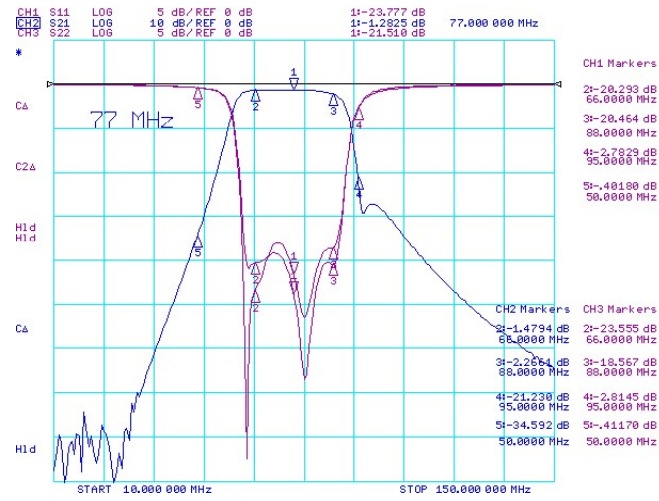

- Attenuation



- Attenuation

