



Features

- ROHS Compliant
- High power rating
- High rejection

Pricing

Quantity	Unit Price
1 ~ 10	₩ 35,000
11 ~ 24	₩ 33,000
25 ~ 49	₩ 30,000
50 ~ 99	₩ 25,000
100 ~	₩ 19,000

Electrical Specifications


Parameter	Frequency (MHz)	Frequency (MHz)	Unit
Band Rejection Range	433MHz		MHz
Band Pass Range	DC~355MHz	500~650MHz	MHz
Insertion Loss	1.0	1.0	dB max
Ripple	0.5	0.5	dB max
Return Loss	10.0	10.0	dB min
Group Delay	-	-	ns
Group Delay Variation	-	-	ns
Band Rejection Attenuation	30		dB min
	-	-	-
	-	-	-
	-	-	-
	-	-	-

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

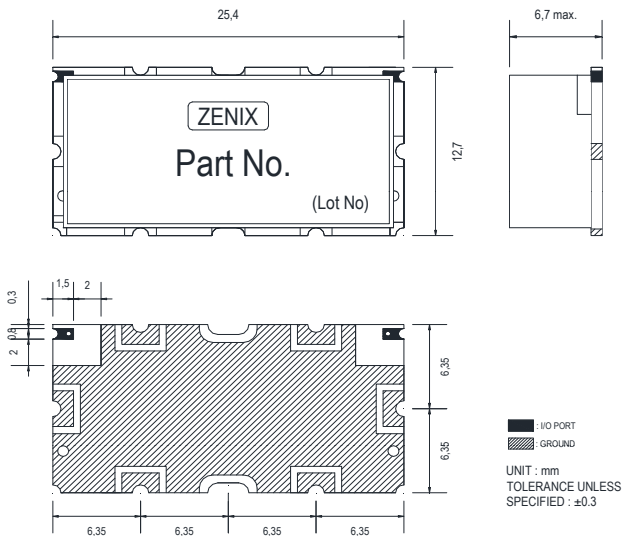


PCB Layout

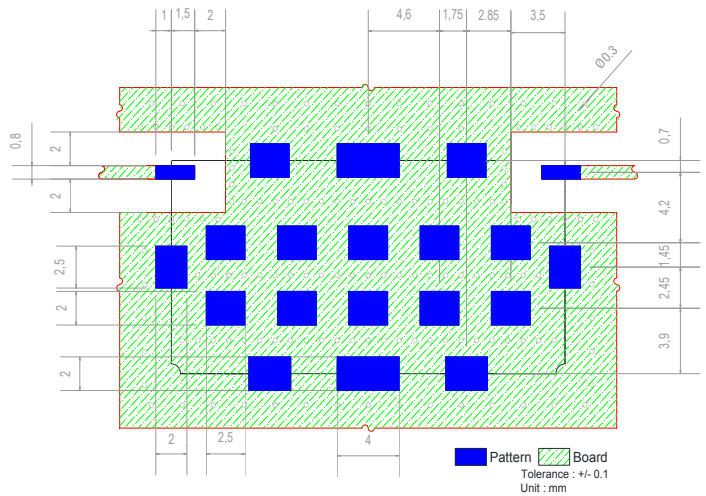

▣ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss

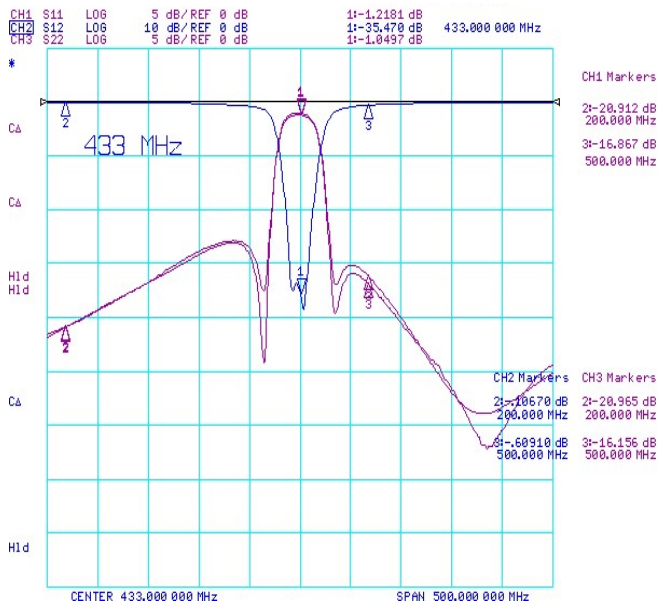

- Attenuation

