



Features

- ROHS Compliant
- High power rating
- High rejection

Pricing

Quantity	Unit Price
1 ~ 10	₩ 40,000
11 ~ 24	₩ 38,000
25 ~ 49	₩ 34,000
50 ~ 99	₩ 29,000
100 ~	₩ 21,000

Electrical Specifications


Parameter	Frequency (MHz)	Frequency (MHz)	Unit
Cut off frequency	930	1660	MHz
Bandwidth	100MHz (830~930MHz)	1130MHz (1660~2790MHz)	MHz
Insertion Loss	1.0	1.0	dB
Ripple	0.5	0.5	dB
Return Loss	16.0	16.0	dB
Group Delay	-	-	ns
Group Delay Variation	-	-	ns
Attenuation	1660~2790MHz @ 70dBc	830~930MHz @ 50dBc	-
	-	-	-
	-	-	-
	-	-	-
	-	-	-

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

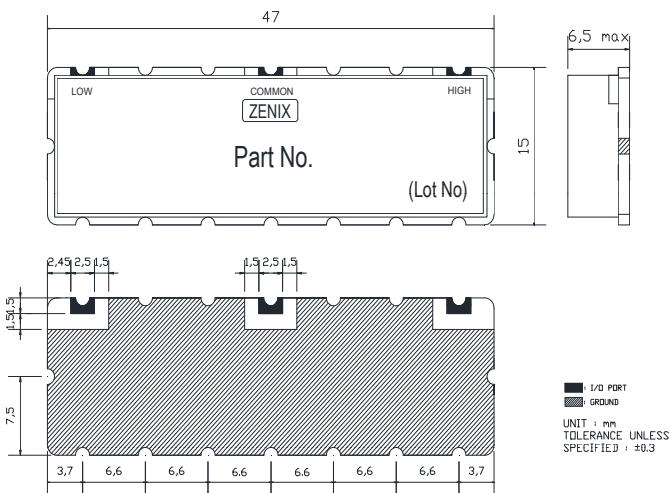


PCB Layout

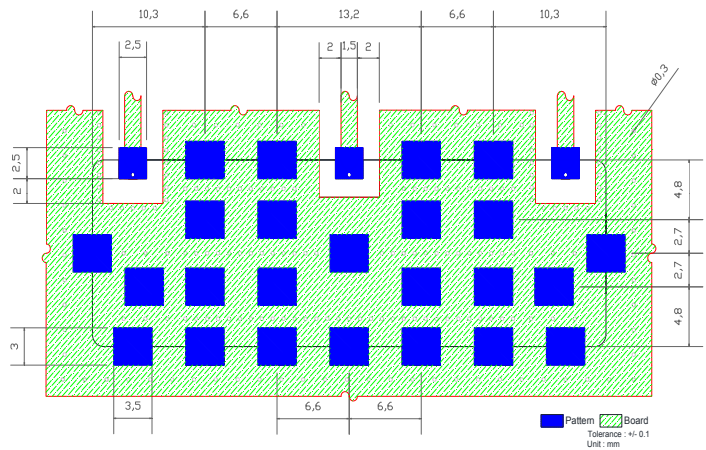

Typical Performance Data at 25°C

• Insertion Loss , Attenuation , Ripple , Return Loss

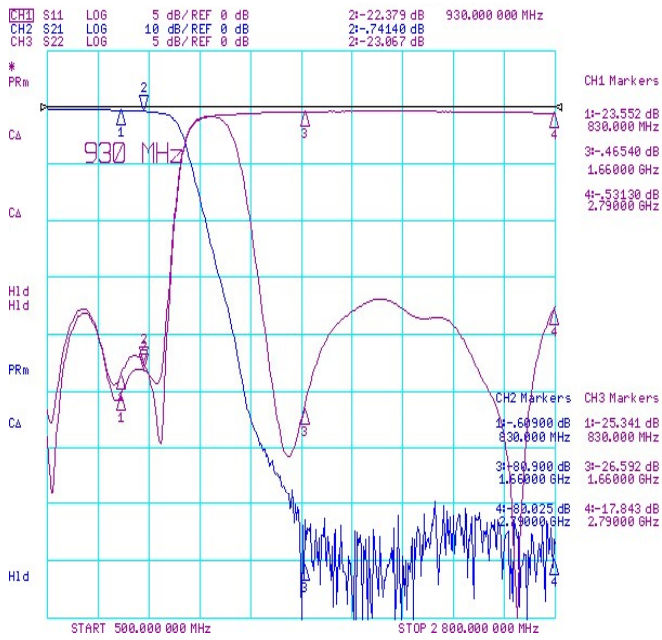

• Insertion Loss , Attenuation , Ripple , Return Loss

