



■ Features

- ROHS Compliant
- High power rating
- High rejection

■ Electrical Specifications


Parameter	Frequency (MHz)	Frequency (MHz)	Unit
Cut off frequency	930	1660	MHz
Bandwidth	100MHz (830~930MHz)	1130MHz (1660~2790MHz)	MHz
Insertion Loss	1.0	1.0	dB
Ripple	0.5	0.5	dB
Return Loss	16.0	16.0	dB
Group Delay	-	-	ns
Group Delay Variation	-	-	ns
Attenuation	1660~2790MHz @ 70dBc	830~930MHz @ 50dBc	-
	-	-	-
	-	-	-
	-	-	-
	-	-	-

■ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

■ Dimension

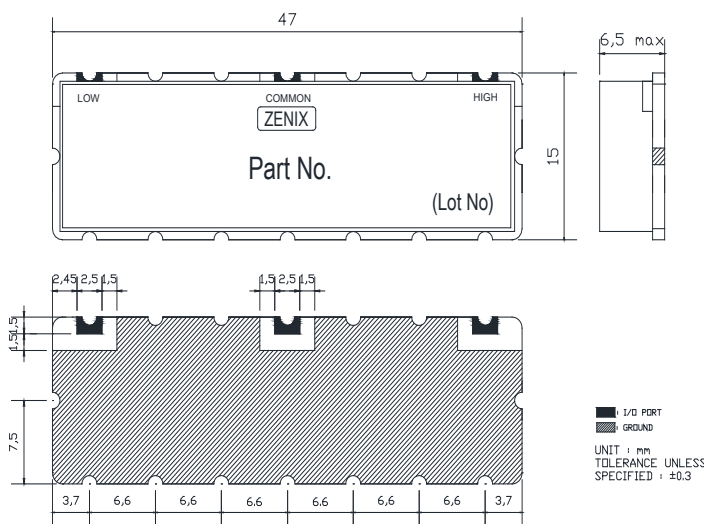

■ PCB Layout

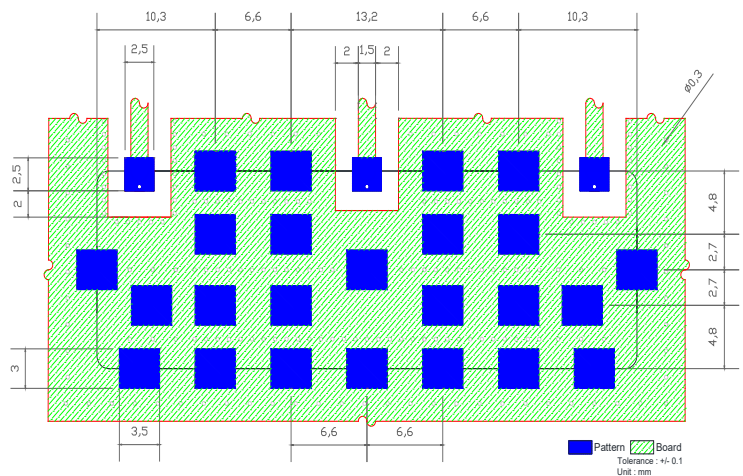

For product information and a complete list of distributors, please go to our website

www.zenix08.com


address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

■ Typical Performance Data at 25°C

- Insertion Loss , Attenuation , Ripple , Return Loss

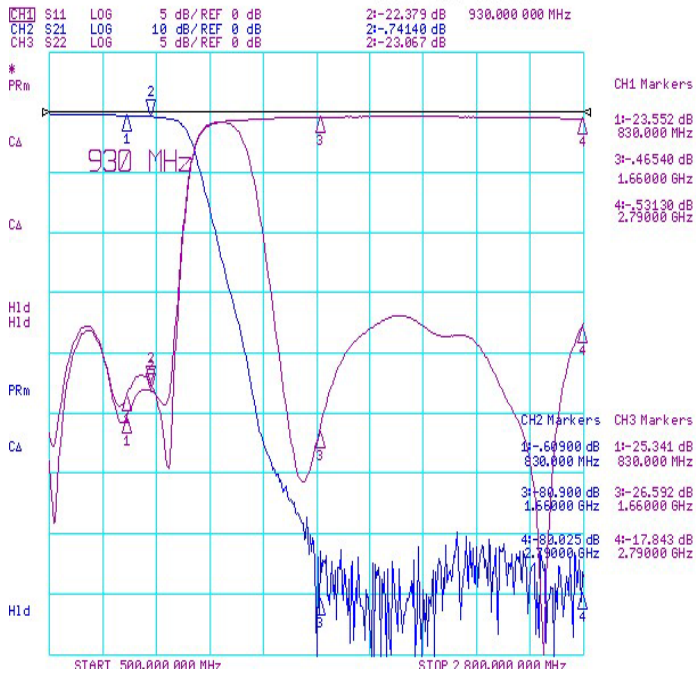

- Insertion Loss , Attenuation , Ripple , Return Loss

