



Features

- ROHS Compliant
- High power rating
- High rejection

Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	1800	-	1800	-	MHz
Bandwidth		1800	-	2600	MHz
Insertion Loss	1800 ~ 2600	-	2.0	3.0	dB
Ripple		-	-	-	dB
Return Loss		15.0	-	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	1500	50.0	-	-	dB
	1600	40.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

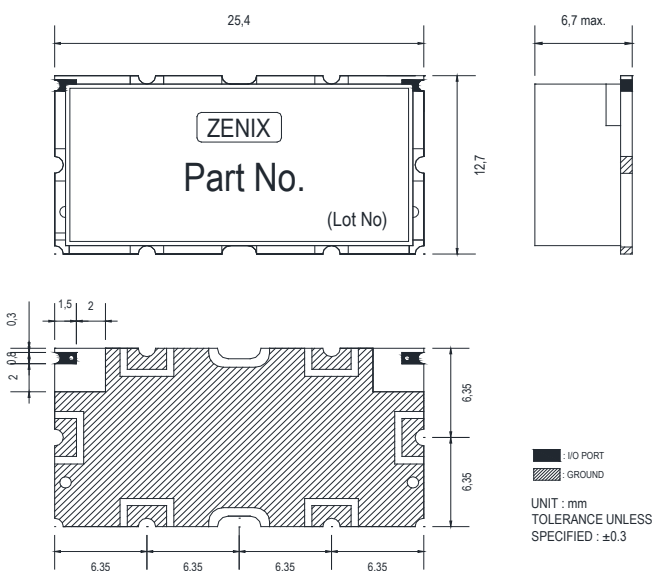

PCB Layout

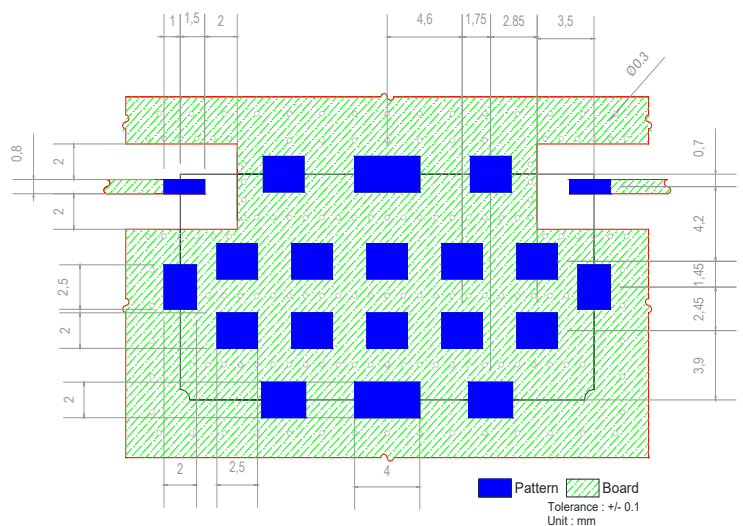

▣ Typical Performance Data at 25°C

- Insertion Loss , Return Loss , Attenuation

