



▣ Features

- ROHS Compliant
- High power rating
- High rejection

▣ Pricing

Quantity	Unit Price
1 ~ 10	₩ 25,000
11 ~ 24	₩ 23,000
25 ~ 49	₩ 21,000
50 ~ 99	₩ 18,000
100 ~	₩ 13,000

▣ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	60	-	60	-	MHz
Bandwidth	-	60	-	2000	MHz
Insertion Loss	60 ~ 2000	-	1.0	1.5	dB
Ripple		-	-	-	dB
Return Loss		16.0	16.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation		27	65.0	-	-
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

▣ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

▣ Dimension

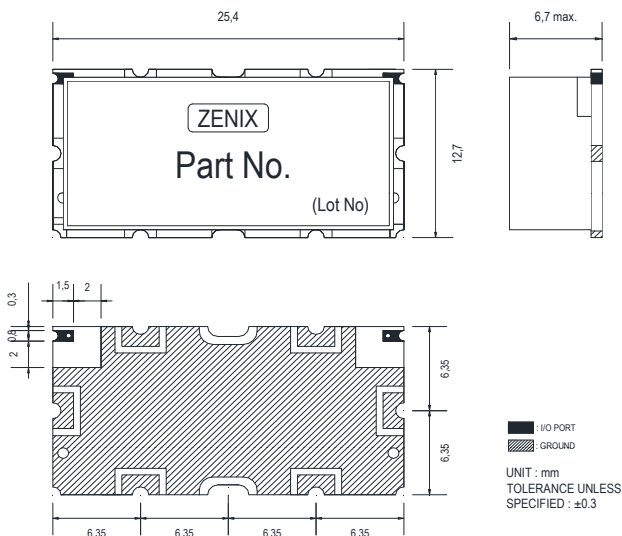

▣ PCB Layout

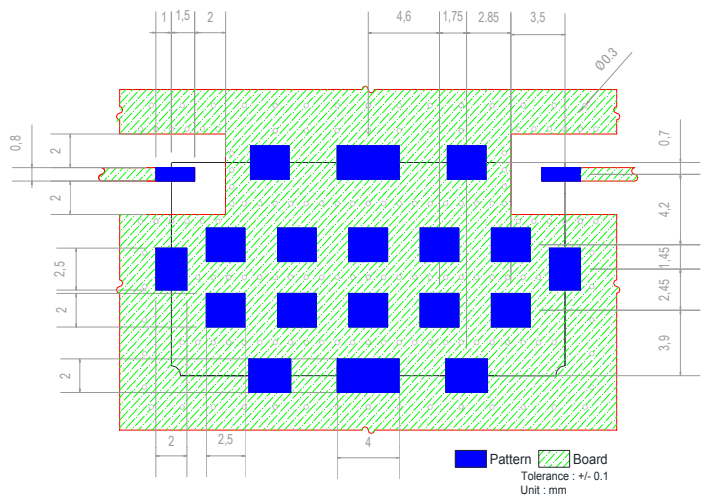

RF& MICROWAVE TOTAL SOLUTION

For product information and a complete list of distributors, please go to our website

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954


Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

www.zenix08.com

▣ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss

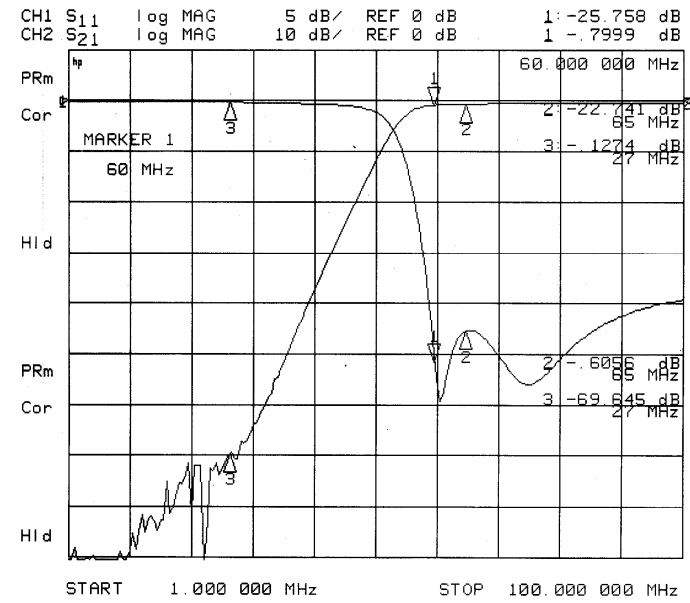

- Attenuation

