



■ Features

- ROHS Compliant
- High power rating
- High rejection

■ Pricing

Quantity	Unit Price
1 ~ 10	₩ 25,000
11 ~ 24	₩ 23,000
25 ~ 49	₩ 21,000
50 ~ 99	₩ 18,000
100 ~	₩ 13,000

■ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	100	-	100	-	MHz
Bandwidth	-	DC	-	100	MHz
Insertion Loss	DC ~ 100	-	1.0	1.5	dB
Ripple		-	-	-	dB
Return Loss		16.0	18.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	120	50.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

■ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

■ Dimension

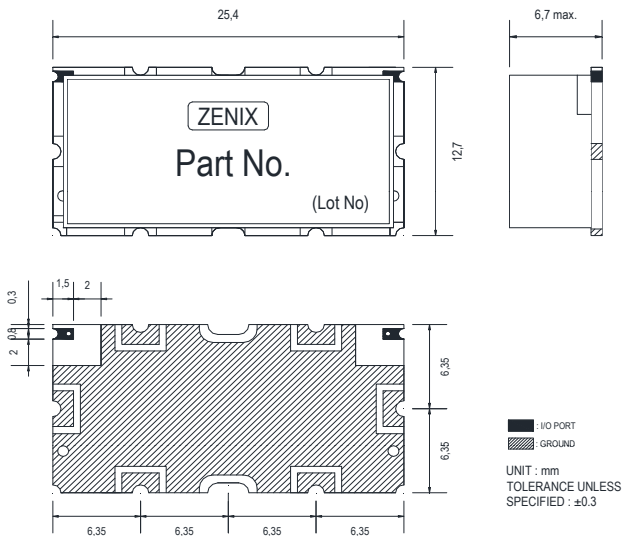

■ PCB Layout

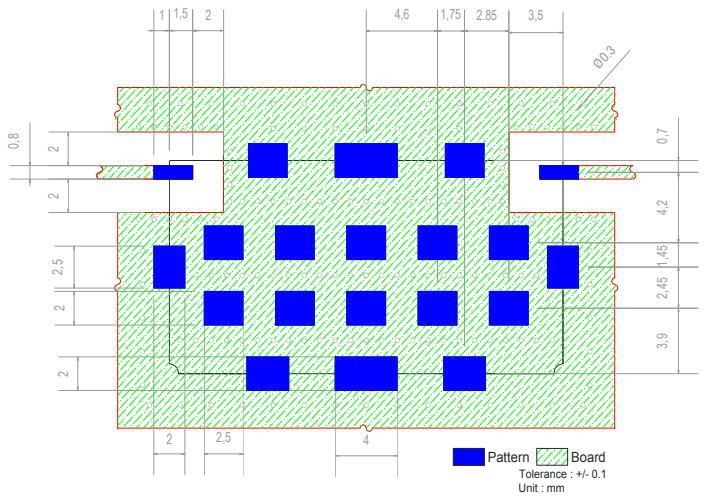

For product information and a complete list of distributors, please go to our website

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

www.zenix08.com

▣ Typical Performance Data at 25°C

- Insertion Loss , Attenuation , Return Loss

