



▣ Features

- ROHS Compliant
- High power rating
- High rejection

▣ Pricing

Quantity	Unit Price
1 ~ 10	₩ 25,000
11 ~ 24	₩ 23,000
25 ~ 49	₩ 21,000
50 ~ 99	₩ 18,000
100 ~	₩ 13,000

▣ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	700	–	700	–	MHz
Bandwidth	–	DC	–	700	MHz
Insertion Loss	DC ~ 700	–	1.0	1.5	dB
Ripple		–	–	–	dB
Return Loss		16.0	18.0	–	dB
Group Delay		–	–	–	ns
Group Delay Variation		–	–	–	ns
Attenuation	750	4.0±1	–	–	dB
	858	20.0	–	–	dB
	–	–	–	–	dB
	–	–	–	–	dB
	–	–	–	–	dB

▣ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

- Permanent damage may occur if any of these limits are exceeded.

▣ Dimension

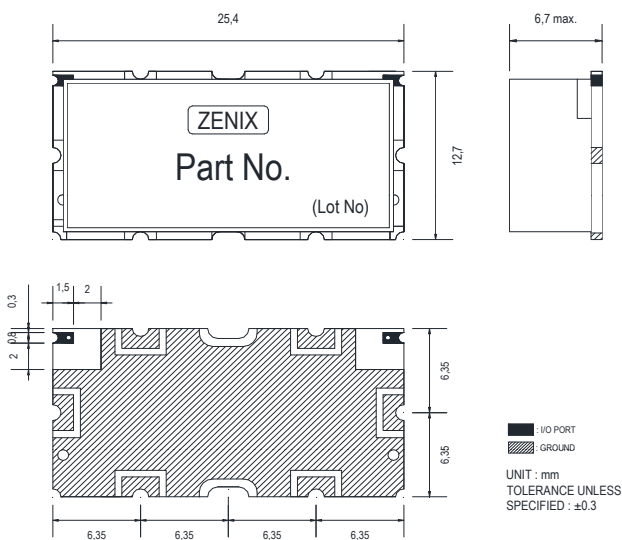

▣ PCB Layout

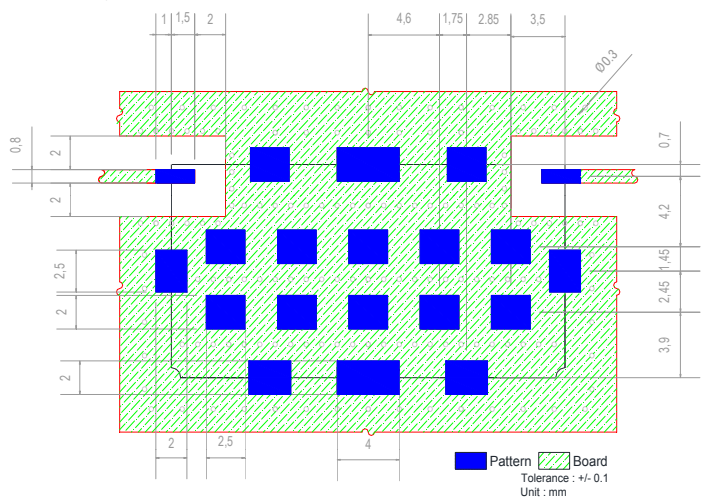

RF& MICROWAVE TOTAL SOLUTION

For product information and a complete list of distributors, please go to our website

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

www.zenix08.com

Typical Performance Data at 25°C

- Insertion Loss , Attenuation , Return Loss

