

# Ceramic Bandpass Filter 50Ω

ZBA-34C-900BWST



### ▣ Features

- ROHS Compliant
- High power rating
- High rejection

### ▣ Pricing

Quantity	Unit Price
1 ~ 10	₩ 52,000
11 ~ 24	₩ 49,000
25 ~ 49	₩ 44,000
50 ~ 99	₩ 38,000
100 ~	₩ 28,000

### ▣ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Center frequency	900	-	900	-	MHz	
Bandwidth	Single Tone	-	-	-	MHz	
Insertion Loss	900	-	3.4	5.0	dB	
Ripple		-	-	-	dB	
Return Loss		18.0	20.0	-	dB	
Attenuation		840	60.0	70.0	-	dB
		960	40.0	50.0	-	dB
		-	-	-	-	-
		-	-	-	-	-
		-	-	-	-	-

### ▣ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

### ▣ Dimension

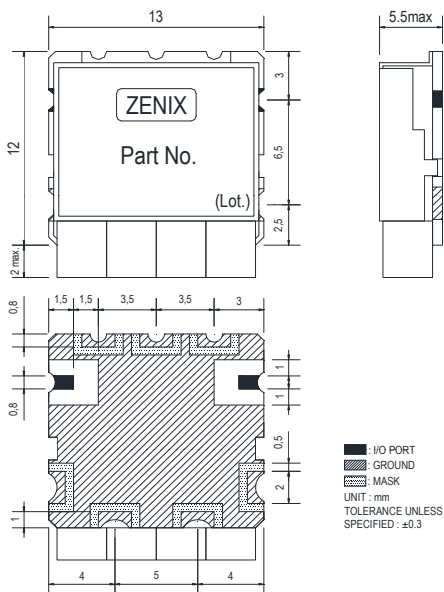

### ▣ PCB Layout

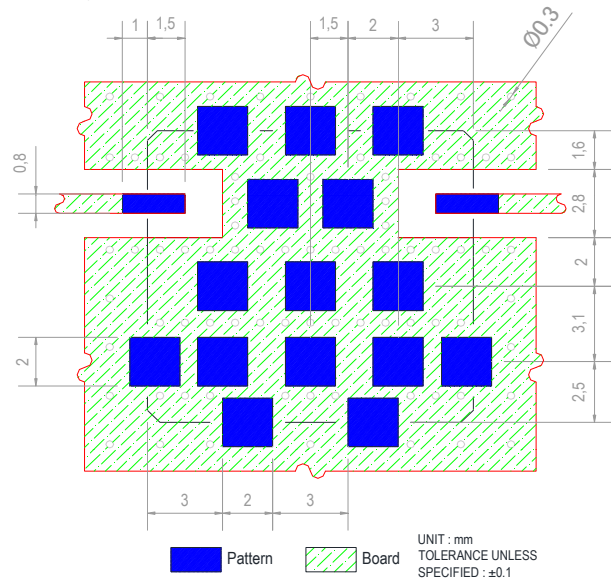

For product information and a complete list of distributors, please go to our website

[www.zenix08.com](http://www.zenix08.com)

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

▣ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

