


Ceramic Bandpass Filter 50Ω

ZBA-67R-1165BW300D

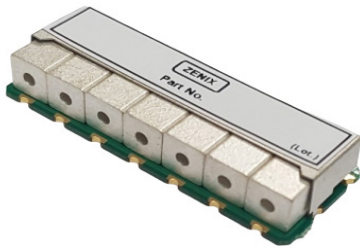

■ Features

- ROHS Compliant
- High power rating
- High rejection

■ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	1165	-	1165	-	MHz
Bandwidth	300	1015	-	1315	MHz
Insertion Loss	1015 ~ 1315	-	1.3	2.0	dB
Ripple		-	0.8	1.5	dB
Return Loss		10.0	12.0	-	dB
Attenuation	915	45.0	50.0	-	dB
	965	20.0	25.0	-	dB
	1365	20.0	23.0	-	dB
	-	-	-	-	-
	-	-	-	-	-

■ Maximum Ratings


Input Power Handling	5Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

- Permanent damage may occur if any of these limits are exceeded.

■ Dimension

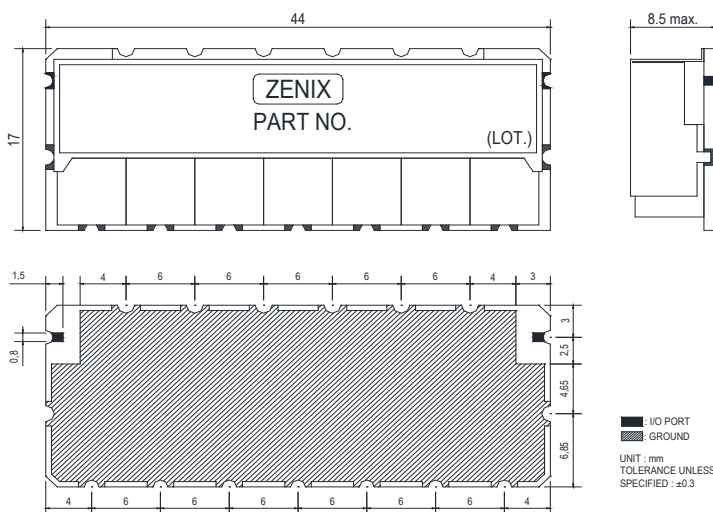

■ PCB Layout

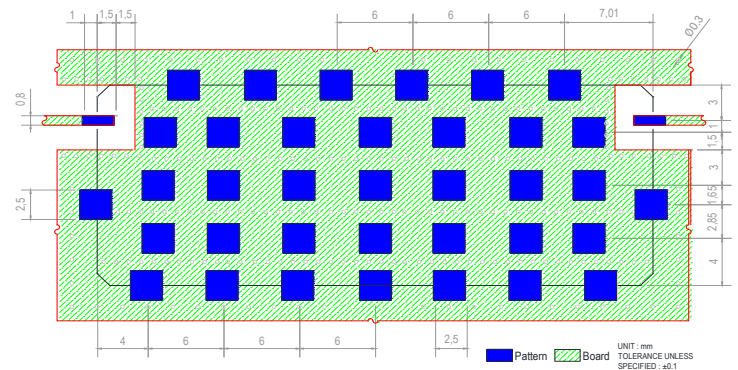

For product information and a complete list of distributors, please go to our website

www.zenix08.com

address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

RF&MICROWAVE TOTAL SOLUTION

Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss, Attenuation

• Attenuation

