



Features

- ROHS Compliant
- High power rating
- High rejection

Pricing

Quantity	Unit Price
1 ~ 10	₩ 40,000
11 ~ 24	₩ 38,000
25 ~ 49	₩ 34,000
50 ~ 99	₩ 29,000
100 ~	₩ 21,000

Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Center frequency	69	-	69	-	MHz
Bandwidth	30	54	-	84	MHz
Insertion Loss	54 ~ 84	-	2.0	2.5	dB
Ripple		-	0.8	1.0	dB
Return Loss		16.0	18.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	44	20.0	-	-	dB
	100	20.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

Dimension

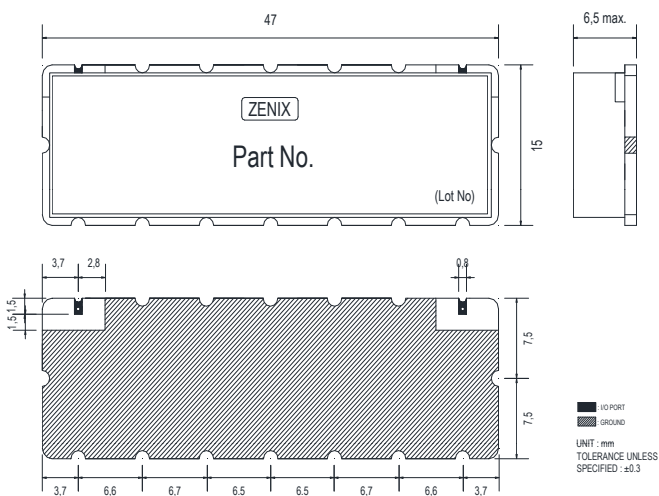

PCB Layout

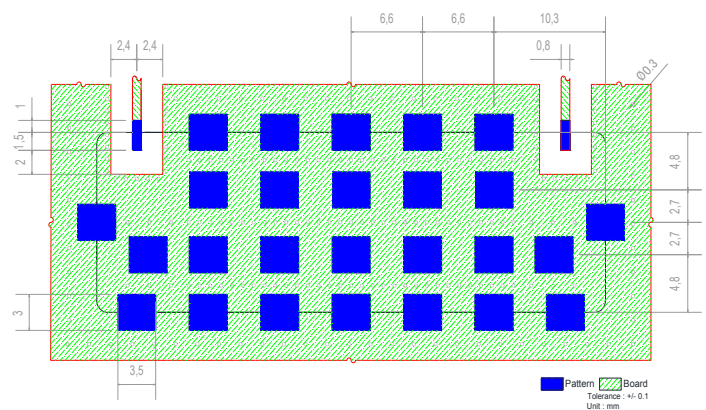

For product information and a complete list of distributors, please go to our website

www.zenix08.com


address : (Heungdeok IT Valley Tower-2111) 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea 16954

Tel : +82-31-8025-7100

Fax : +82-31-8025-7200

▣ Typical Performance Data at 25°C

• Insertion Loss , Return Loss

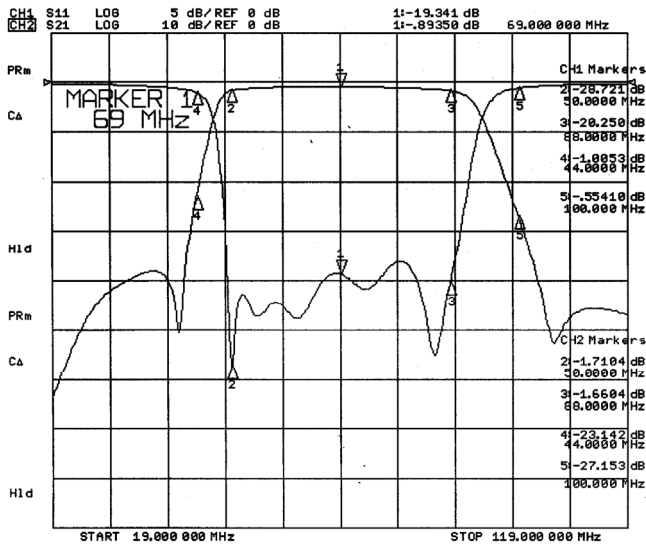

• Attenuation , Ripple

