



▣ Features

- ROHS Compliant
- High power rating
- High rejection

▣ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	60	-	60	-	MHz
Bandwidth	-	60	-	2000	MHz
Insertion Loss	60 ~ 2000	-	1.0	1.5	dB
Ripple		-	-	-	dB
Return Loss		16.0	16.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	27	65.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

▣ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

▣ Dimension

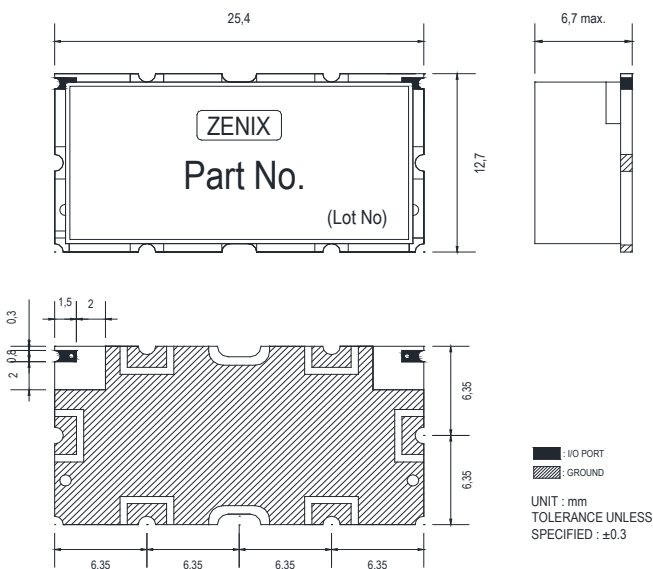


▣ PCB Layout

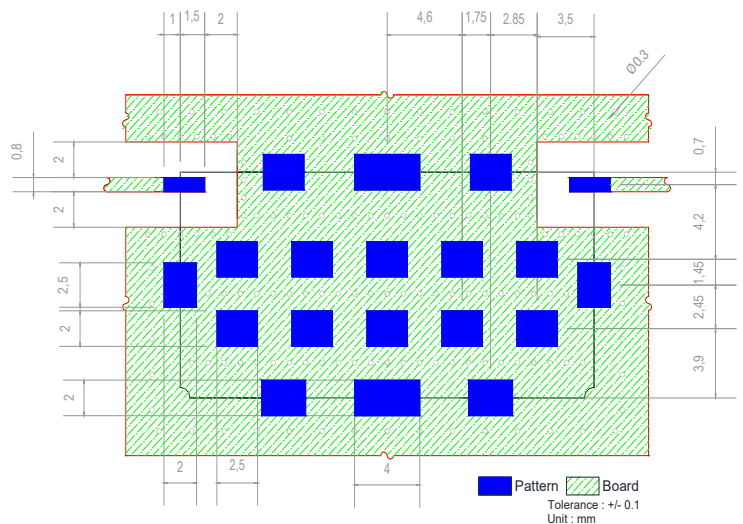

▣ Typical Performance Data at 25°C

- Insertion Loss, Ripple, Return Loss

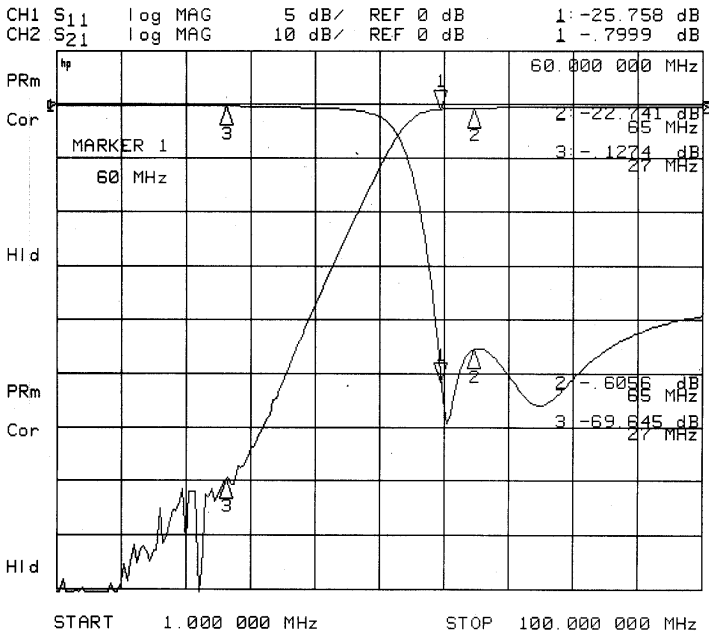

- Attenuation

