



■ Features

- ROHS Compliant
- High power rating
- High rejection

■ Electrical Specifications


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Cut Off frequency	920	-	920	-	MHz
Bandwidth		920	-	2800	MHz
Insertion Loss	920 ~ 2800	-	1.0	1.5	dB
Ripple		-	-	-	dB
Return Loss		15.0	16.0	-	dB
Group Delay		-	-	-	ns
Group Delay Variation		-	-	-	ns
Attenuation	650	60.0	-	-	dB
	750	25.0	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB
	-	-	-	-	dB

■ Maximum Ratings


Input Power Handling	3Watt max.
Operating Temperature	-30°C to 70°C
Storage Temperature	-40°C to 95°C

• Permanent damage may occur if any of these limits are exceeded.

■ Dimension

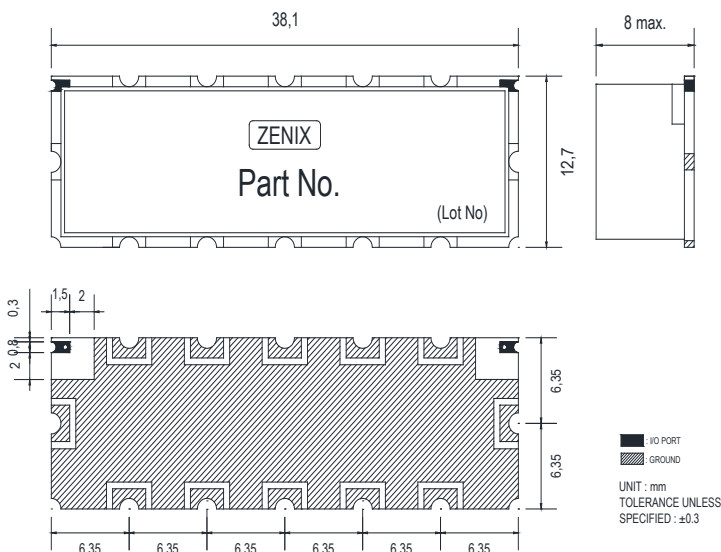

■ PCB Layout

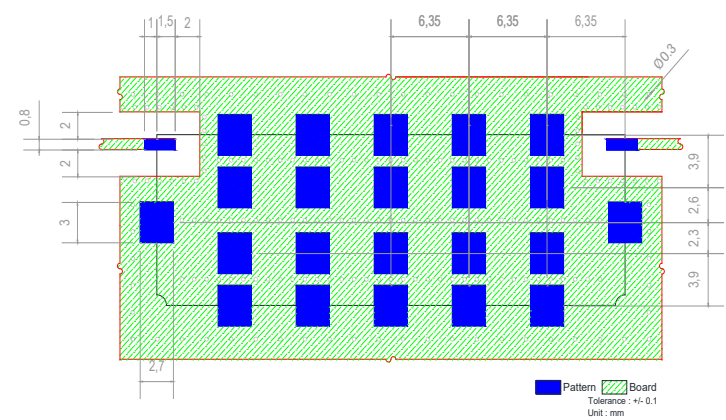

▣ Typical Performance Data at 25°C

- Insertion Loss , Attenuation , Return Loss

